

# catchbox mod wireless microphone system

Catchbox Mod converts any wireless beltpack transmitter into a Catchbox throwable microphone for audience engagement. Catchbox Mod comes with an integrated professional microphone element and features Automute™ technology, which automatically mutes the Catchbox when in motion. Specially designed adapter cables ensure full compatibility with transmitters from all major wireless microphone brands.



## General Specifications

Weight (with Cover, without wireless transmitter) **280 g / 9.90 oz**

Dimensions (with Cover) **180 × 180 × 180 mm / 7 × 7 × 7 in**

Built-in Automute technology **Yes**

Working range **Depends on the wireless system used\***

Battery type **1 x AA (LR6)**

Battery life **>20 hours (with alkaline battery)**

Microphone element **Electret condenser, omni-directional**

Additional audio latency **0 ms**

Audio frequency response **30 to 20 000 Hz**


Operating temperature range **0 °C (32 °F) to 30 °C (86 °F)**

Storage temperature range **0 °C (32 °F) to 50 °C (122 °F)**

Wireless charger compatible **No**

\* The actual operating range depends upon the RF output settings, the surroundings, the signal absorption, signal reflection and signal interference


## Audio frequency response

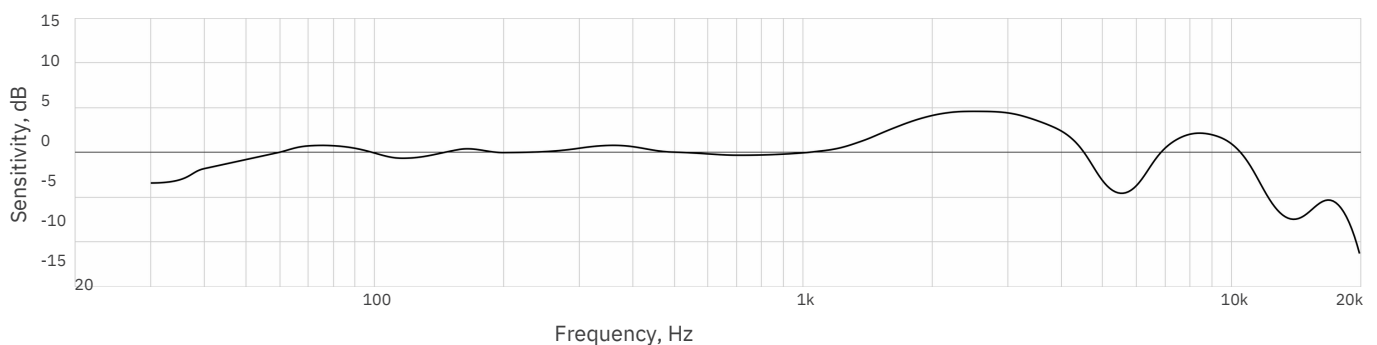

\* Note: Frequency response is measured with attached foam cap



## Adapter cables included

### Mini-XLR TA4 (Shure compatible)

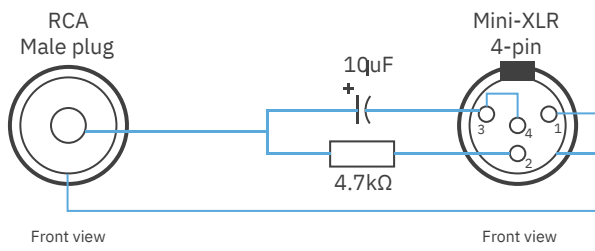


RCA to 4 pin mini XLR cable

### 3.5 mm / 1/8in jack (Sennheiser compatible)

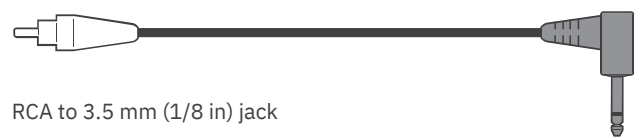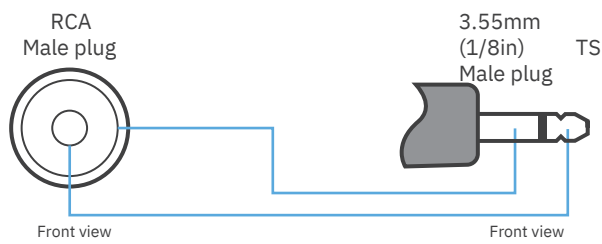

RCA to 3.5 mm (1/8 in) jack


### Mini-XLR TA3 (AKG compatible)

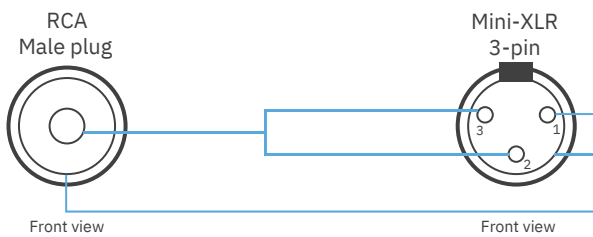

RCA to 3 pin mini XLR cable


Cables for other brand transmitters available for purchase.

## Quick start guide

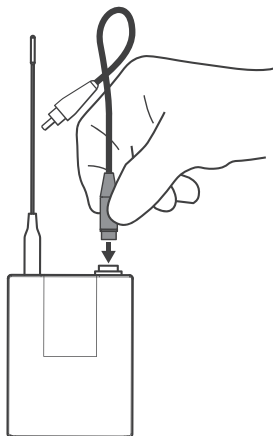

1

Plug the compatible adapter cable to the 3rd party transmitter

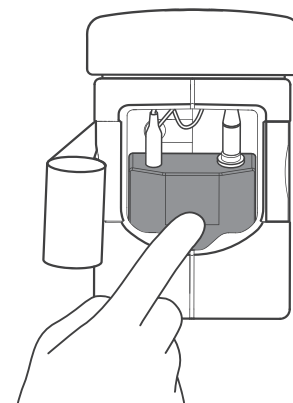

2

Plug the adapter cable to Catchbox Mod and make sure that the transmitter is safely fitted in the cavity

Cavity dimensions - 87 × 68 × 30 mm / 3.4 × 2.7 × 1.1 in